

Terms and Conditions of Use

This drawing, including all information depicted herein (collectively, “Drawing”), is FUTEK’s property and protected under applicable law, including copyright. FUTEK reserves all rights. The Drawing is provided solely for your information and exclusive use. **Except as expressly approved by FUTEK in writing, you may not reproduce or share this Drawing**, in whole or part, with any other firm or individual, or attempt to reverse engineer the Drawing or data contained therein. Any reproduction of this Drawing in whole or part must include this legend.

By accessing the Drawing, you agree that you have read, understand, and agree to abide by the stated Terms and Conditions of Use.

© 2023 FUTEK Advanced Sensor Technology, Inc.

FUTEK MODEL IDC305

Digital Controller with SPI, UART, and Analog Output

DRAWING NUMBER: FI1431-B

INCH [mm] | R.O.= Rated Output

Item #: QSH01916

SENSOR CONNECTOR

Pin	Code
1	-Signal
2	+Signal
3	Ground
4	Excitation

BOARD TO BOARD CONNECTOR



Pin	Code
1	CS
2	5.3V IN
3	MOSI
4	GROUND
5	DRDY
6	SCLK
7	N/C
8	MISO
9	3.3V IN
10	VOUT

BOARD TO BOARD
CONNECTOR
MFG #: 0524651071

SENSOR CONNECTOR
(BOTTOM CONTACT)
MFG #: 68710414522

PROGRAMMING CONNECTOR
MFG #: DF12C(3.0)-10DS-0.5V(81)

Ø0.079 [2.0]
MOUNTING HOLES (N/C)

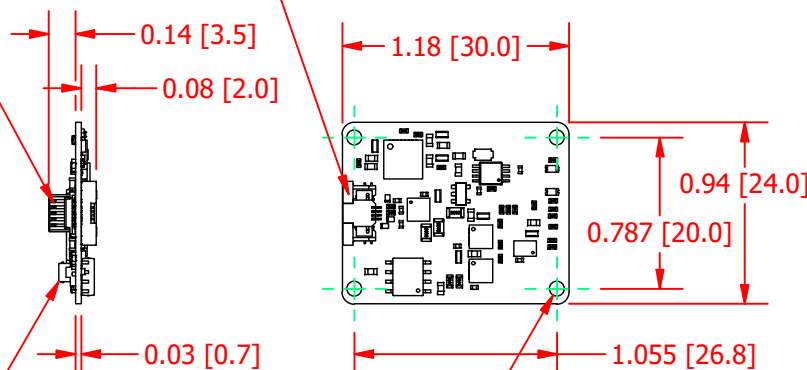

SPECIFICATIONS:

Power:

- 5.3VDC @ 17 mA => 0.0901 W
- 3.3VDC @ 21 mA => 0.0639 W (w/ LEDs off)
- 20-40mV peak-to-peak ripple in passband
- 20MHz bandwidth (cutoff 40dB @ 20MHz)

Total Consumption: 0.159 W or 159mW (w/ LEDs off)

SPI Output:

- 5 Wire:
 - CS
 - MISO
 - MOSI
 - SCLK
 - DRDY
- Logic Level: 3.3 VDC
- Clock Speed: 12.5 MHz (Max)
- Mode:
 - CPOL = 0
 - CPHA = 0
- Word:
 - Size: 32 Bits
 - Format:
 - Byte 1 (Bits 31:24): Command
 - Byte 2-4 (Bits 23:0): Binary Two's Complement Data
 - Note:
 - See latest revision of FUTEK document EM1026 for timing, commands, and communication structure

Sampling:

- Noise Free Resolution 19 Bits @ 5 SPS
- Noise Free Resolution 13 Bits @ 4800 SPS
- Sampling Rate: 5 or 4800 SPS
- Integral Nonlinearity: 0.01% of FSR
- Gain Drift: 2 ppm/°C (max)
- Zero Drift: ±7 nV/°C (max)

Stored Calibration:

- 11 Points (Including Zero)

Analog Output:

- Zero Balance: 2.5 VDC
- Negative Full Scale: 0.01 VDC
- Positive Full Scale: 5.0 VDC
- Bandwidth: 10 kHz
- Nonlinearity: 0.01% of FSR
- Gain Drift: ~20ppm/°C
- Zero Drift: ~40ppm/°C
- Noise: 40mVp-p @ 10kHz
- Load Impedance: > 2500Ω

Sensor Input:

- Excitation: 5 VDC
- Bridge Resistance: 350-5000Ω
- Sensitivity Range: ±1.40 - 1.80 mV/V

FUTEK

This drawing, including all information depicted herein (collectively, "Drawing"), is FUTEK's property and protected under applicable law, including copyright. FUTEK reserves all rights. The Drawing is provided solely for your information and exclusive use. Except as expressly approved by FUTEK in writing, you may not reproduce or share this Drawing in whole or part, with any other firm or individual, or attempt to reverse engineer the Drawing or data contained therein. Any reproduction of this Drawing in whole or part must include this legend.

10 THOMAS
IRVINE, CA 92618 USA
+1 (949) 465-0900

INTERNET:
<http://www.futek.com>
SHEET 1 OF 1