

CKT-FD10 Series

10-32 Jack Connector Kit for Coaxial Cable




TEST & MEASUREMENT PRODUCTS



Product Features

- ▶ For use with 10-32 Test and Measurement Accelerometers & Coaxial Cabling
- ▶ CKT-FD10-07 for use with TMC01 and TMC03 Cabling
- ▶ CKT-FD10-101 for use with TMC02 Cabling

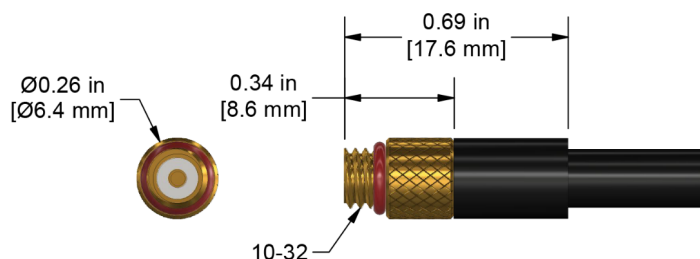

Specifications

Temperature Range	-80 to 392 °F (-60 to 200 °C)
Connector Type	10-32 Jack (Female) Connector
Strain Relief	Molded Boot
Max Coupling Torque	8 in-lbs
Impedance	50 ohm
Insulation Resistance	5 x 10 ⁶ ohm
Shell Material	Gold Plated Brass
Pin Contact Material	Gold Plated Brass
Pin-Out	Center Socket = Signal (+) Shell = Common (-)

Ratings & Certifications

RoHS

Built to Order