


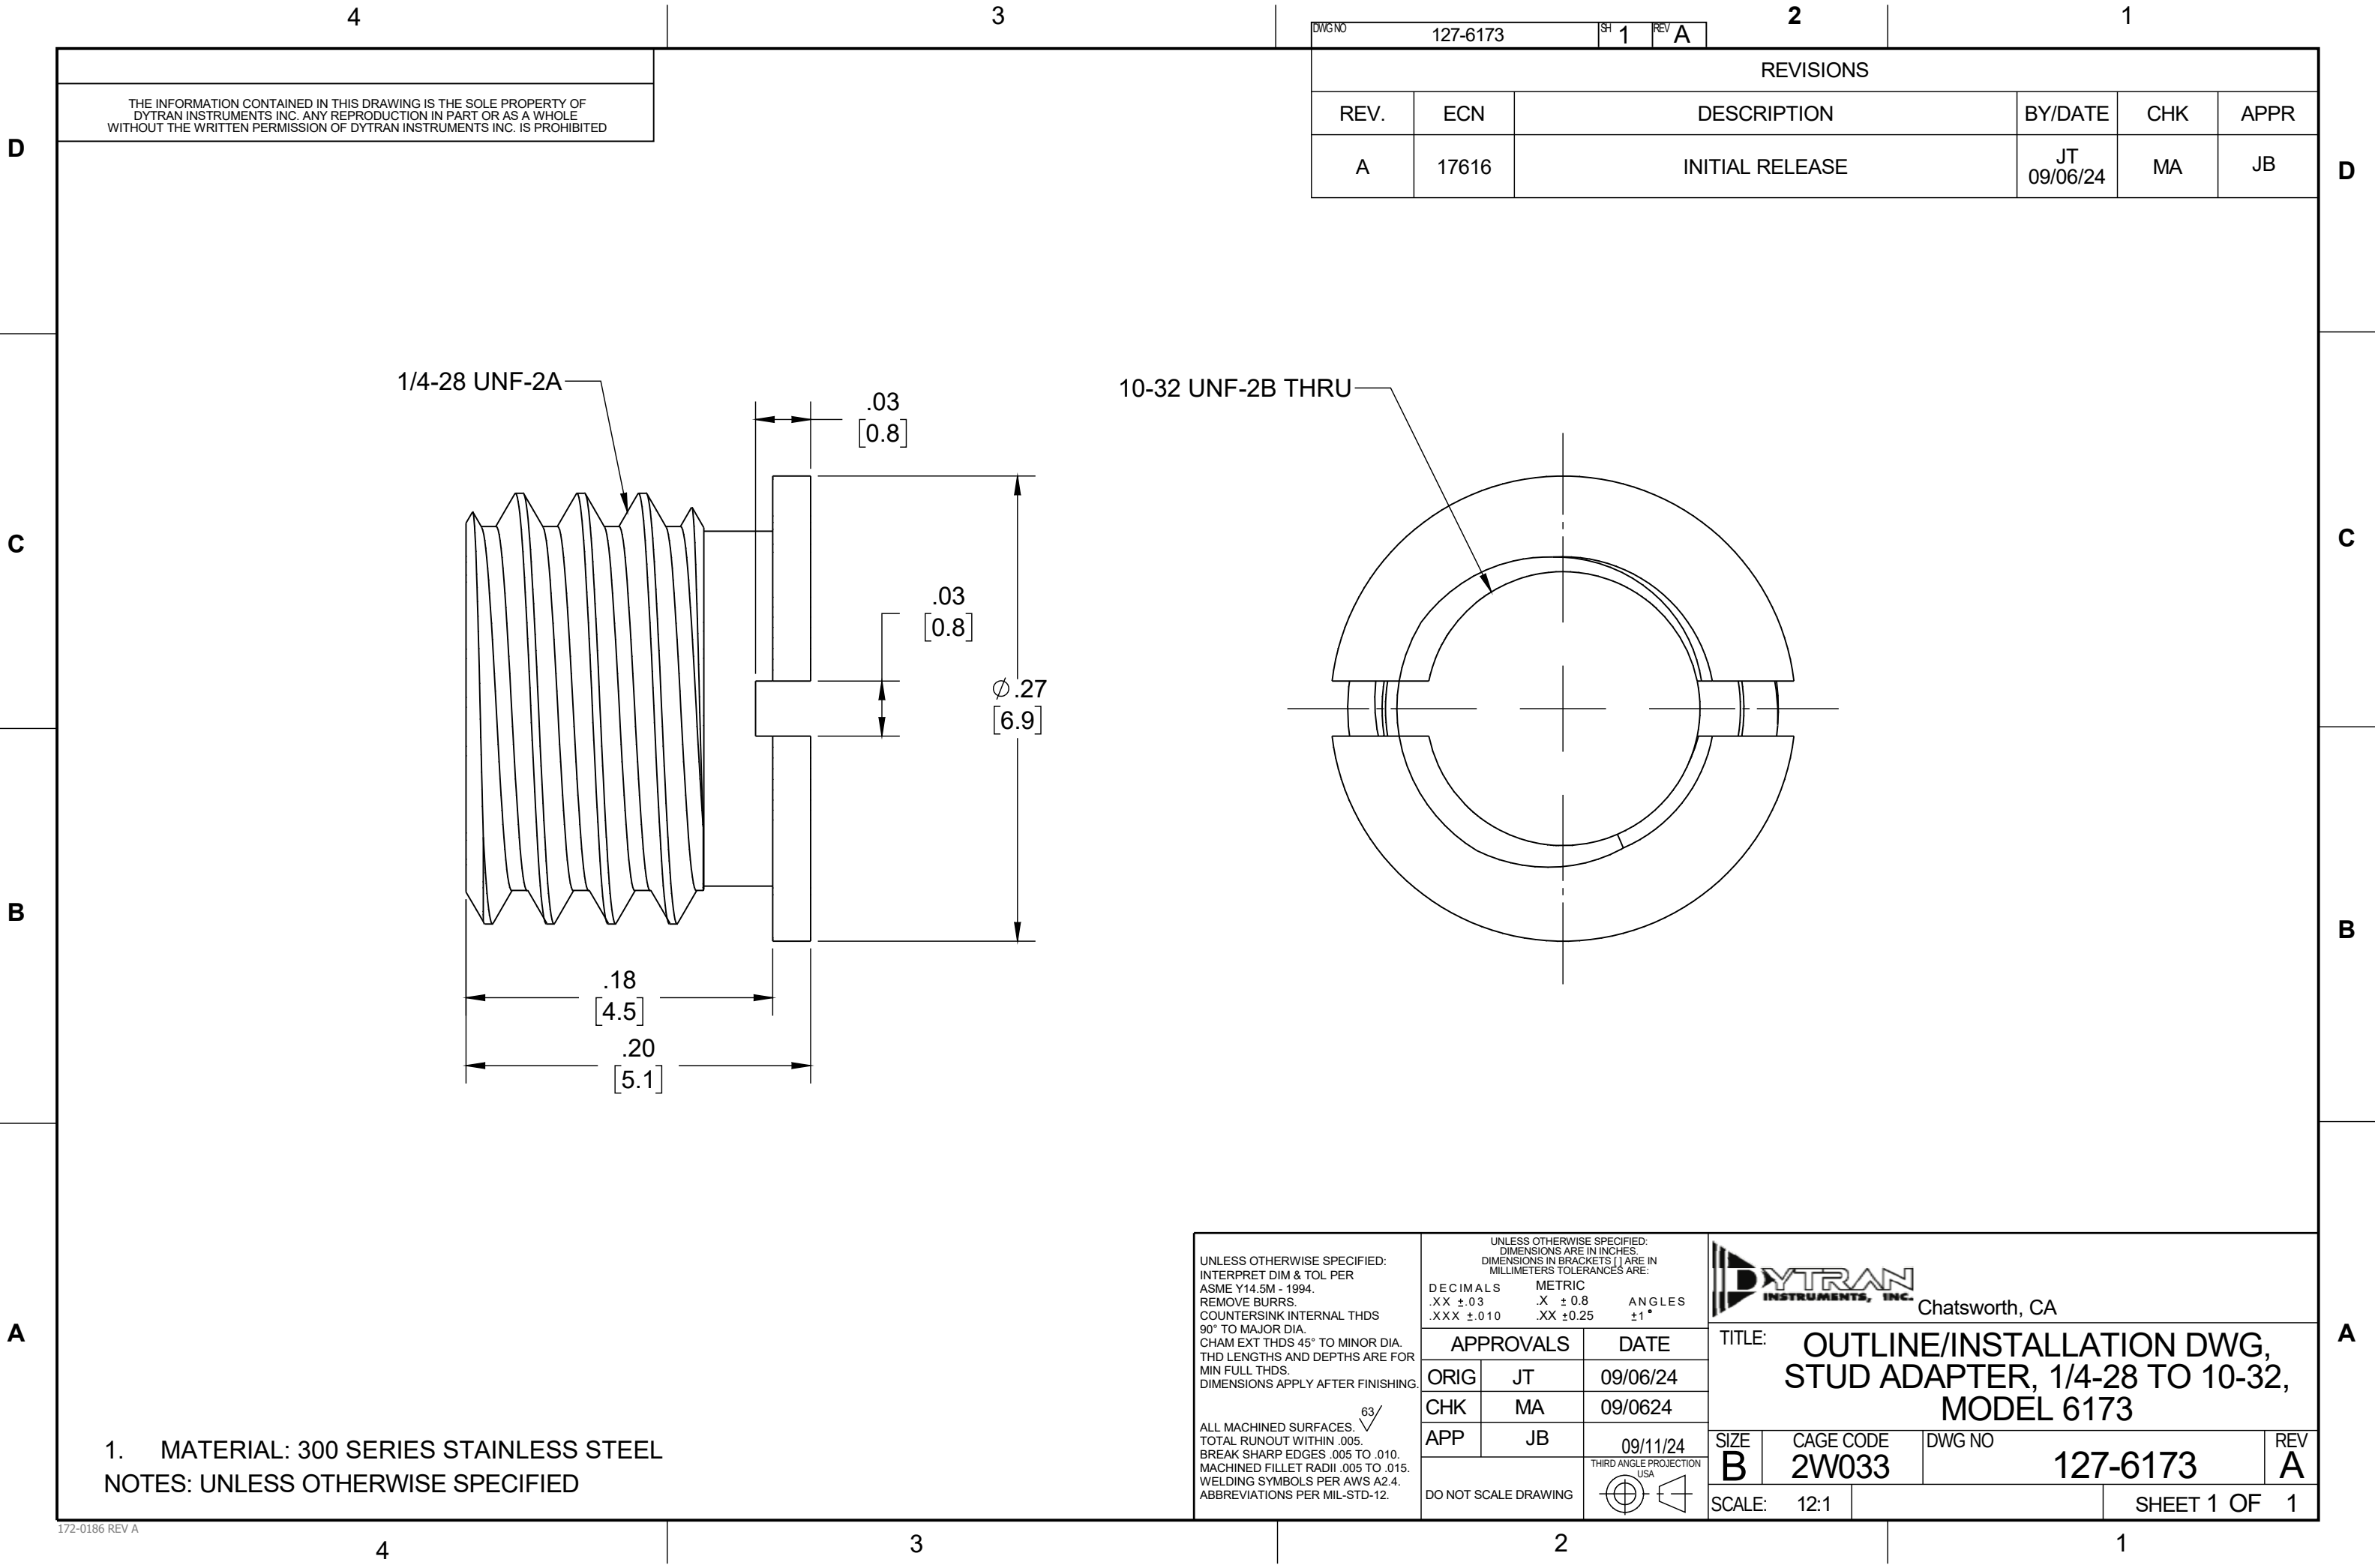

UNLESS OTHERWISE SPECIFIED:
INTERPRET DIM & TOL PER
ASME Y14.5M - 1994.
REMOVE BURRS.
COUNTERSINK INTERNAL THDS
90° TO MAJOR DIA.
CHAM EXT THDS 45° TO MINOR DIA.
THD LENGTHS AND DEPTHS ARE FOR
MIN FULL THDS.
DIMENSIONS APPLY AFTER FINISHING.

ALL MACHINED SURFACES.
TOTAL RUNOUT WITHIN .005.
BREAK SHARP EDGES .005 TO .010.
MACHINED FILLET RADII .005 TO .015.
WELDING SYMBOLS PER AWS A2.4.
ABBREVIATIONS PER MIL-STD-12.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES.
DIMENSIONS IN BRACKETS [] ARE IN
MILLIMETERS TOLERANCES ARE:

DECIMALS	METRIC	ANGLES
.XX ±.03	.X ±.08	ANGLES ±1°
.XXX ±.010	.XX ±0.25	

APPROVALS		DATE
ORIG	JT	09/06/24
CHK	MA	09/0624
APP	JB	09/11/24
DO NOT SCALE DRAWING		THIRD ANGLE PROJECTION USA

DYTRAN
INSTRUMENTS, INC. Chatsworth, CA

TITLE: **OUTLINE/INSTALLATION DWG,
STUD ADAPTER, 1/4-28 TO 10-32,
MODEL 6173**

SIZE B	CAGE CODE 2W033	DWG NO 127-6173	REV A
SCALE: 12:1		SHEET 1 OF 1	