


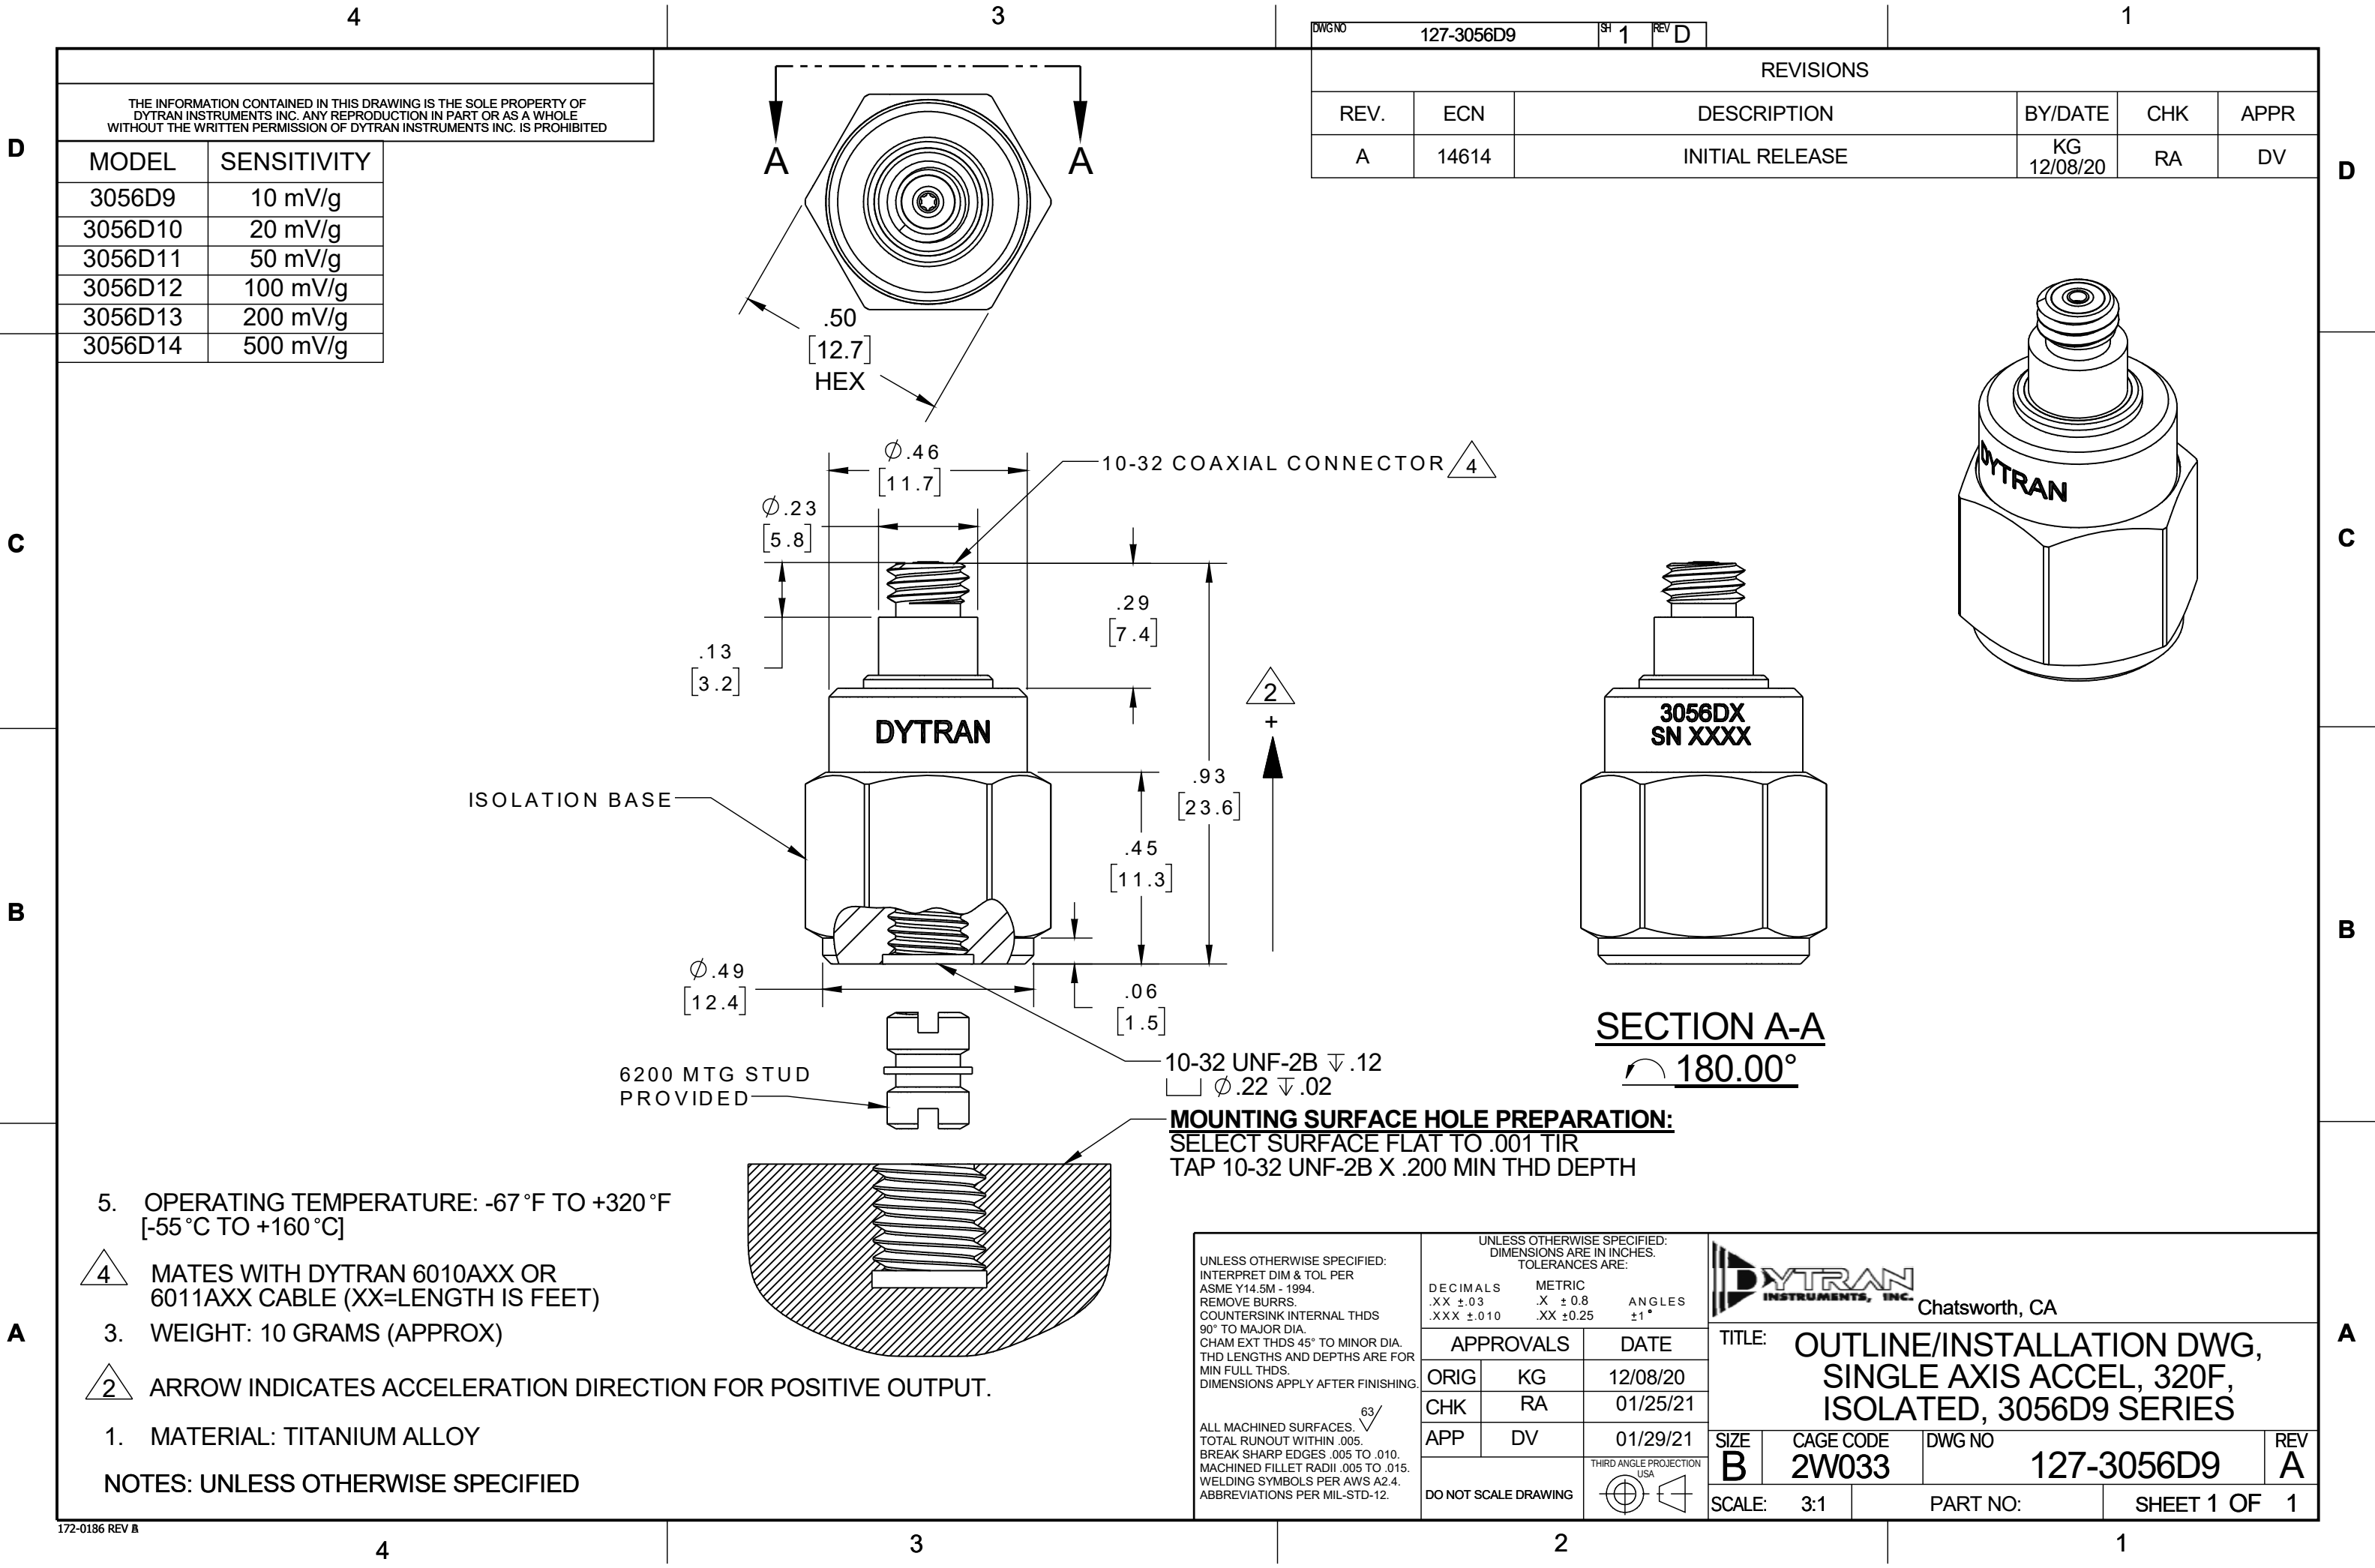


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

MODEL	SENSITIVITY
3056D9	10 mV/g
3056D10	20 mV/g
3056D11	50 mV/g
3056D12	100 mV/g
3056D13	200 mV/g
3056D14	500 mV/g

DWGNO 127-3056D9 SH 1 REV D

REVISIONS					
REV.	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	14614	INITIAL RELEASE	KG 12/08/20	RA	DV

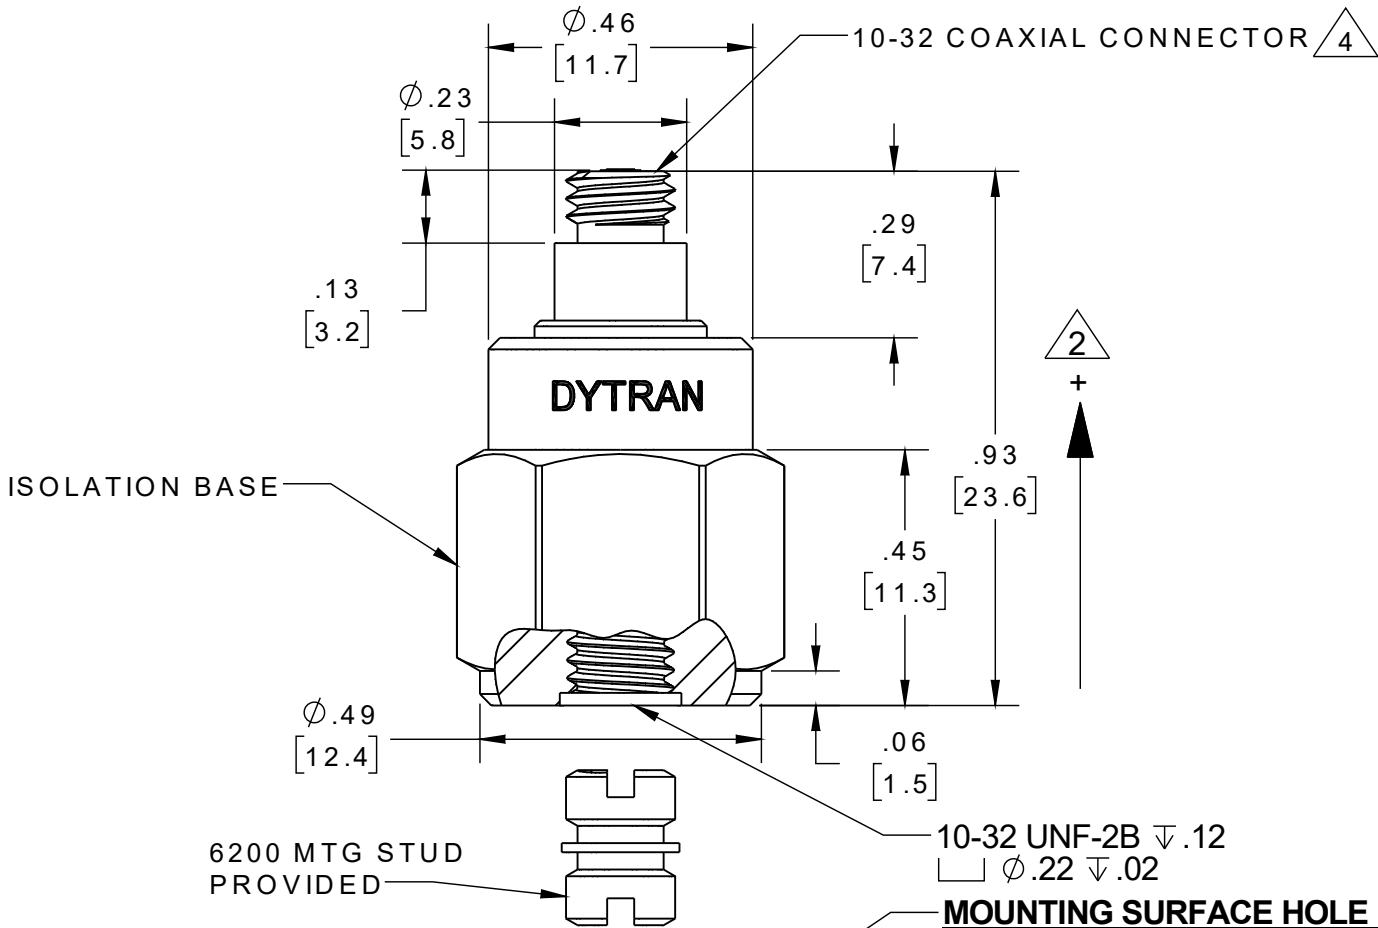

5. OPERATING TEMPERATURE: -67°F TO +320°F
[-55°C TO +160°C]

4. MATES WITH DYTRAN 6010AXX OR
6011AXX CABLE (XX=LENGTH IS FEET)

3. WEIGHT: 10 GRAMS (APPROX)

2. ARROW INDICATES ACCELERATION DIRECTION FOR POSITIVE OUTPUT.

1. MATERIAL: TITANIUM ALLOY

NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED:
INTERPRET DIM & TOL PER
ASME Y14.5M - 1994.
REMOVE BURRS.
COUNTERSINK INTERNAL THDS
90° TO MAJOR DIA.
CHAM EXT THDS 45° TO MINOR DIA.
THD LENGTHS AND DEPTHS ARE FOR
MIN FULL THDS.
DIMENSIONS APPLY AFTER FINISHING.

ALL MACHINED SURFACES.
TOTAL RUNOUT WITHIN .005.
BREAK SHARP EDGES .005 TO .010.
MACHINED FILLET RADII .005 TO .015.
WELDING SYMBOLS PER AWS A2.4.
ABBREVIATIONS PER MIL-STD-12.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:

DECIMALS	METRIC	ANGLES
.XX $\pm$.03	.X $\pm$ 0.8	ANGLES $\pm$ 1°
.XXX $\pm$.010	.XX $\pm$ 0.25	

APPROVALS		DATE
ORIG	KG	12/08/20
CHK	RA	01/25/21
APP	DV	01/29/21

DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION
USA



Chatsworth, CA

TITLE: OUTLINE/INSTALLATION DWG,
SINGLE AXIS ACCEL, 320F,
ISOLATED, 3056D9 SERIES

SIZE	CAGE CODE	DWG NO	REV
B	2W033	127-3056D9	A

SCALE: 3:1 PART NO: SHEET 1 OF 1

