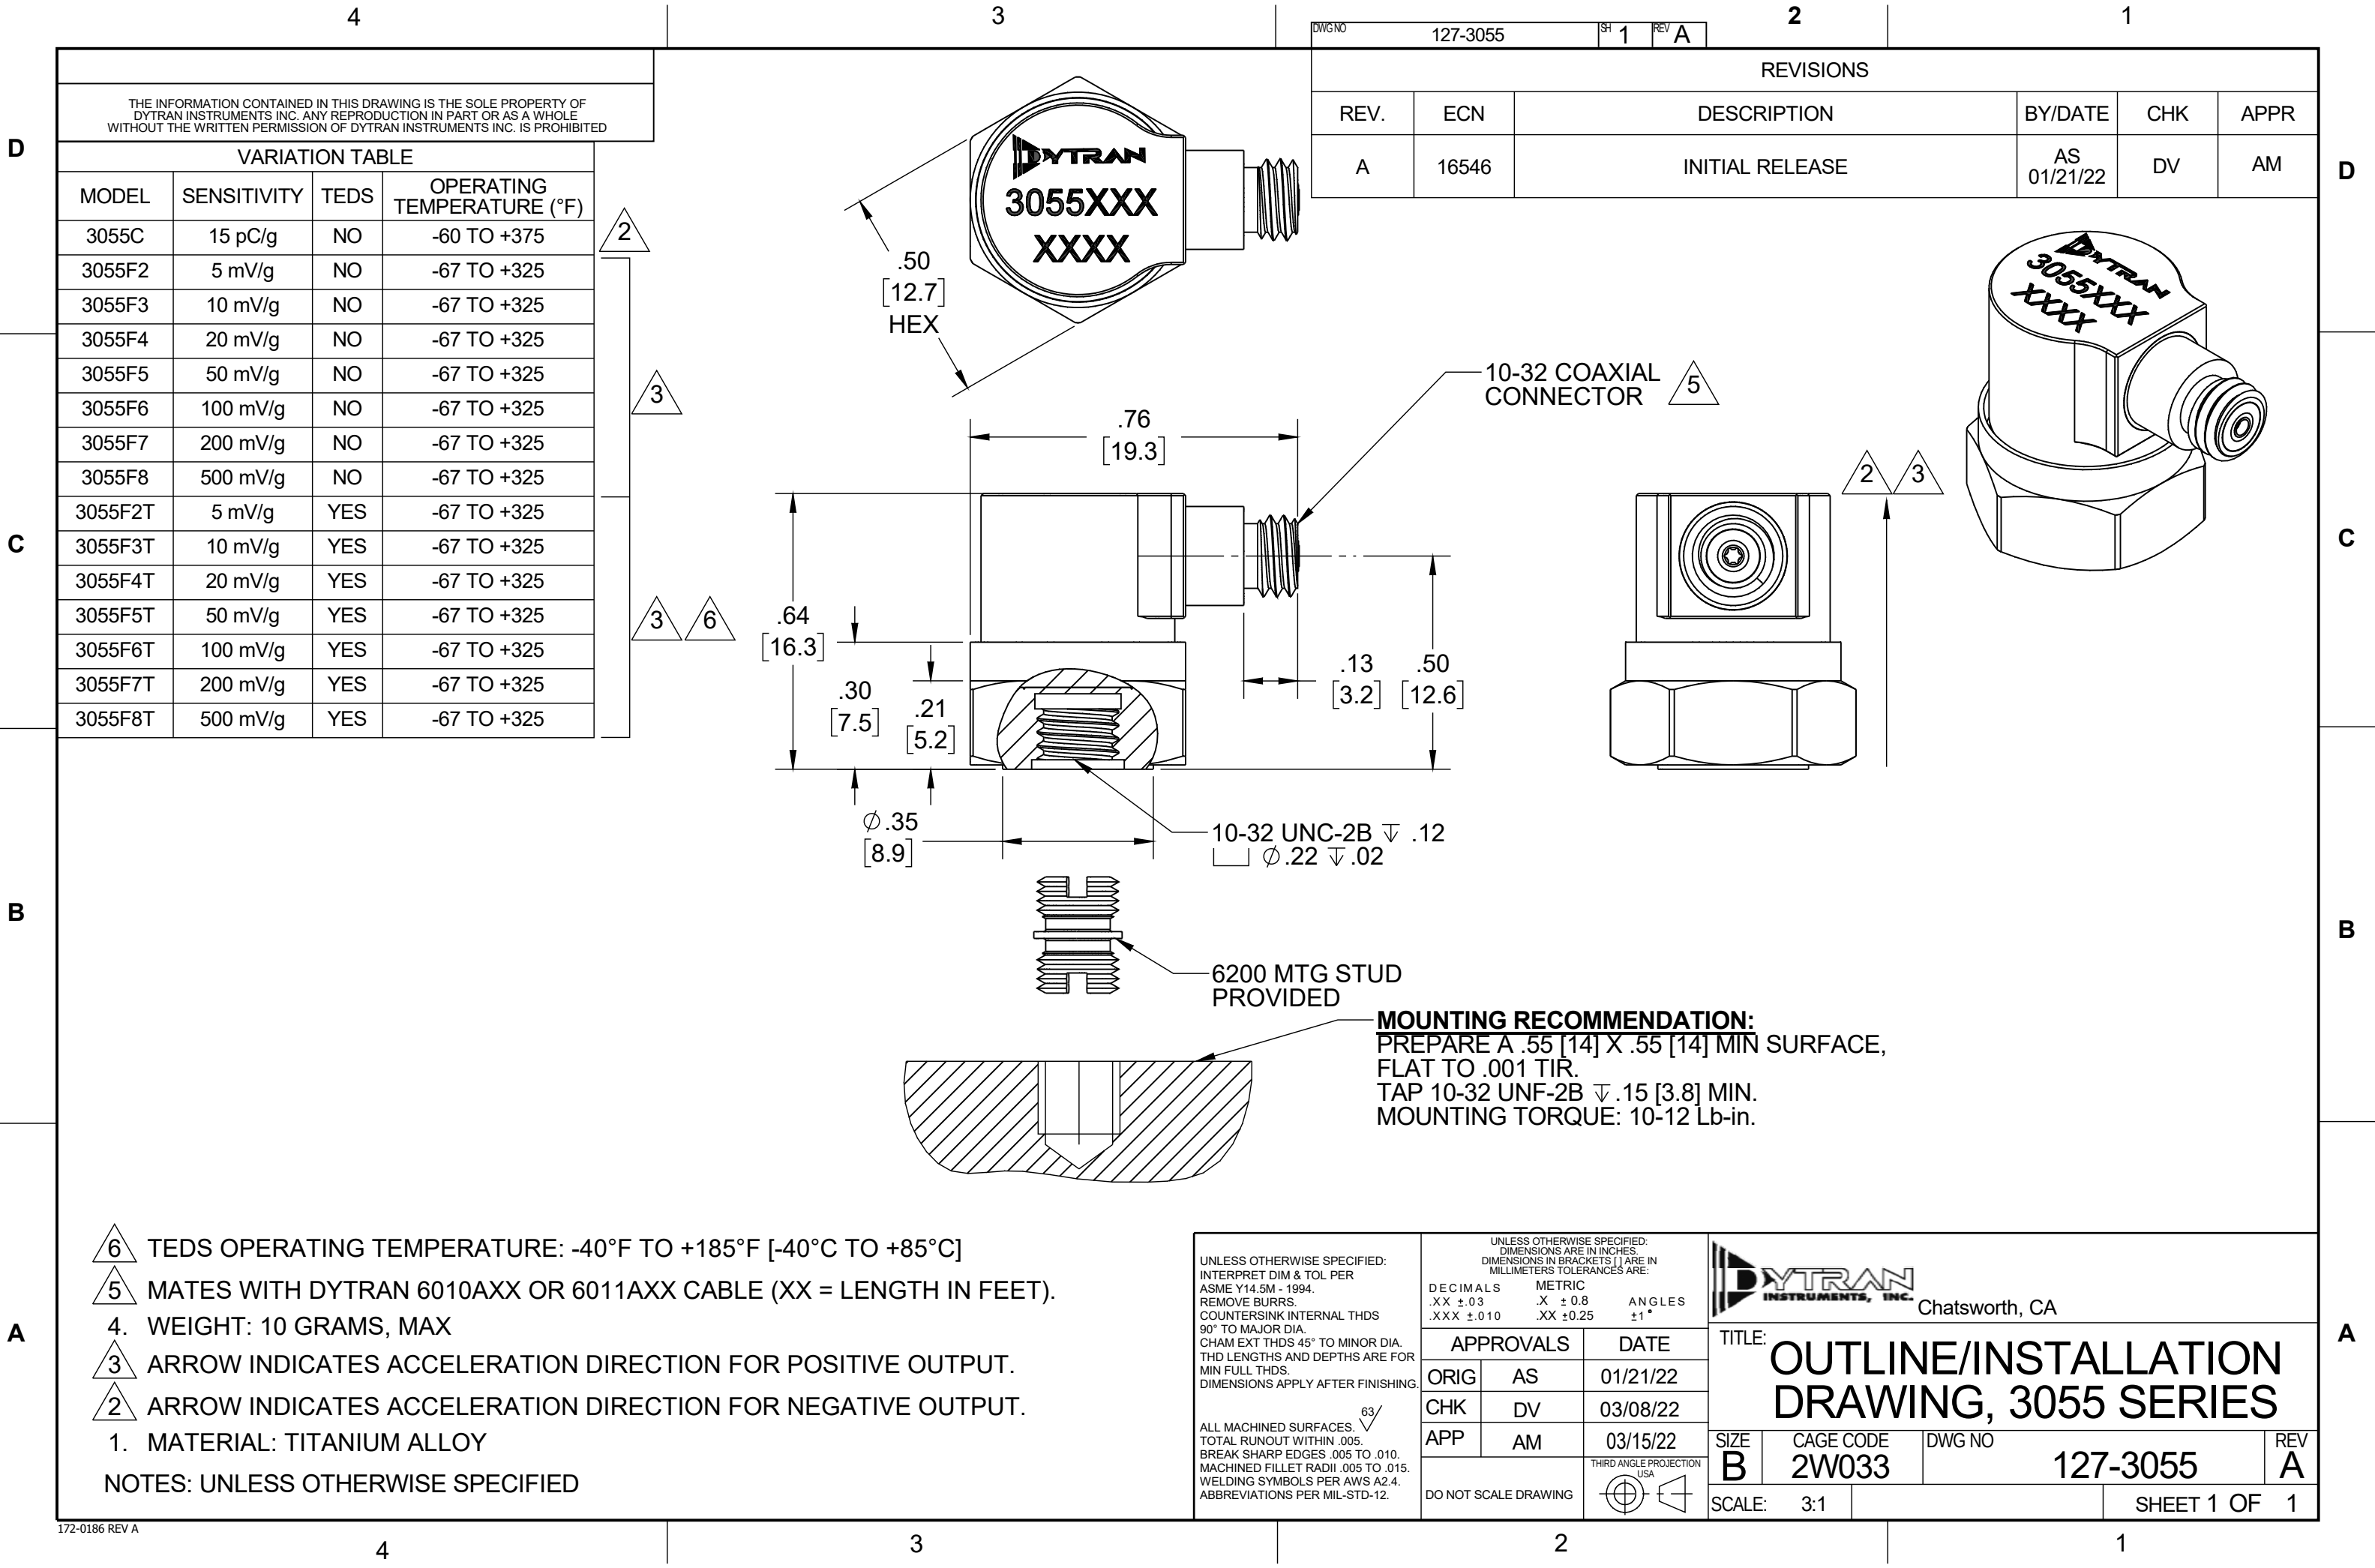




- 6 TEDS OPERATING TEMPERATURE: -40°F TO +185°F [-40°C TO +85°C]
- 5 MATES WITH DYTRAN 6010AXX OR 6011AXX CABLE (XX = LENGTH IN FEET).
4. WEIGHT: 10 GRAMS, MAX
- 3 ARROW INDICATES ACCELERATION DIRECTION FOR POSITIVE OUTPUT.
- 2 ARROW INDICATES ACCELERATION DIRECTION FOR NEGATIVE OUTPUT.
1. MATERIAL: TITANIUM ALLOY
- NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED:
INTERPRET DIM & TOL PER
ASME Y14.5M - 1994.
REMOVE BURRS.
COUNTERSINK INTERNAL THDS
90° TO MAJOR DIA.
CHAM EXT THDS 45° TO MINOR DIA.
THD LENGTHS AND DEPTHS ARE FOR
MIN FULL THDS.
DIMENSIONS APPLY AFTER FINISHING.

ALL MACHINED SURFACES.
TOTAL RUNOUT WITHIN .005.
BREAK SHARP EDGES .005 TO .010.
MACHINED FILLET RADII .005 TO .015.
WELDING SYMBOLS PER AWS A2.4.
ABBREVIATIONS PER MIL-STD-12.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES.
DIMENSIONS IN BRACKETS [] ARE IN
MILLIMETERS TOLERANCES ARE:

DECIMALS	METRIC	ANGLES
.XX ±.03	.X ±0.8	±1°
.XXX ±.010	.XX ±0.25	

APPROVALS		DATE
ORIG	AS	01/21/22
CHK	DV	03/08/22
APP	AM	03/15/22

DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION
USA

DYTRAN
INSTRUMENTS, INC.

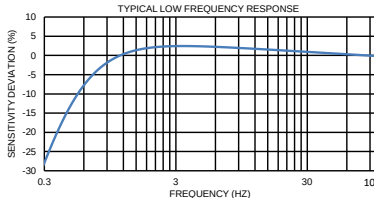
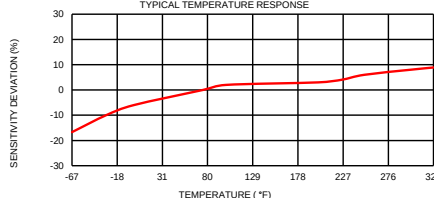
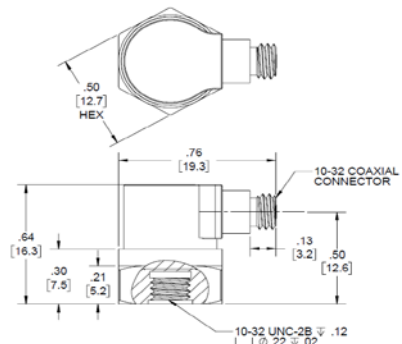
Chatsworth, CA

TITLE:
**OUTLINE/INSTALLATION
DRAWING, 3055 SERIES**

SIZE	CAGE CODE	DWG NO	REV
B	2W033	127-3055	A

SCALE: 3:1

SHEET 1 OF 1

Model Number 3055F5T		PERFORMANCE SPECIFICATIONS				DOC NO PS3055F5T																																				
		IEPE ACCELEROMETER				REV B, ECN 17467, 06/10/24																																				
		• HIGH TEMPERATURE • BASE ISOLATED • IDEAL LOW FREQUENCY RESPONSE • HERMETICALLY SEALED • TEDS FEATURE				This family also includes: <table><tr><th>Model</th><th>Sensitivity (mV/g)</th><th>Frequency Response, ±10% (Hz)</th><th>Time Constant (Sec)</th><th>Operating Temp (°F)</th></tr><tr><td>3055F2T</td><td>5</td><td>1 to 10,000</td><td>0.5 to 1.5</td><td>-67 to +325</td></tr><tr><td>3055F3T</td><td>10</td><td>1 to 10,000</td><td>0.5 to 1.5</td><td>-67 to +325</td></tr><tr><td>3055F4T</td><td>20</td><td>1 to 10,000</td><td>0.5 to 1.5</td><td>-67 to +325</td></tr><tr><td>3055F6T</td><td>100</td><td>1 to 10,000</td><td>0.5 to 1.5</td><td>-67 to +325</td></tr><tr><td>3055F7T</td><td>200</td><td>1 to 10,000</td><td>0.5 to 1.5</td><td>-67 to +325</td></tr><tr><td>3055F8T</td><td>500</td><td>1 to 10,000</td><td>0.5 to 1.5</td><td>-67 to +325</td></tr></table>		Model	Sensitivity (mV/g)	Frequency Response, ±10% (Hz)	Time Constant (Sec)	Operating Temp (°F)	3055F2T	5	1 to 10,000	0.5 to 1.5	-67 to +325	3055F3T	10	1 to 10,000	0.5 to 1.5	-67 to +325	3055F4T	20	1 to 10,000	0.5 to 1.5	-67 to +325	3055F6T	100	1 to 10,000	0.5 to 1.5	-67 to +325	3055F7T	200	1 to 10,000	0.5 to 1.5	-67 to +325	3055F8T	500	1 to 10,000	0.5 to 1.5	-67 to +325
Model	Sensitivity (mV/g)	Frequency Response, ±10% (Hz)	Time Constant (Sec)	Operating Temp (°F)																																						
3055F2T	5	1 to 10,000	0.5 to 1.5	-67 to +325																																						
3055F3T	10	1 to 10,000	0.5 to 1.5	-67 to +325																																						
3055F4T	20	1 to 10,000	0.5 to 1.5	-67 to +325																																						
3055F6T	100	1 to 10,000	0.5 to 1.5	-67 to +325																																						
3055F7T	200	1 to 10,000	0.5 to 1.5	-67 to +325																																						
3055F8T	500	1 to 10,000	0.5 to 1.5	-67 to +325																																						
PHYSICAL Weight Connector Mounting Provision Material, Housing/Connector Sensing Element Element Style		Type Tapped Hole		Refer to the performance specifications of the products in this family for detailed description																																						
		ENGLISH		SI																																						
		0.35 10-32 10-32 X .150 ↓ Titanium Ceramic Planar Shear		oz grams 10.0 10-32 10-32 X .150 ↓ Titanium Ceramic Planar Shear																																						
PERFORMANCE Sensitivity, ±5% [2] Range for ± 5 Volts Output Frequency Response, ±5% Frequency Response, ±10% Resonant Frequency Broad Band Resolution Linearity [3] Maximum Transverse sensitivity Strain Sensitivity @ 250µε		50 100 1 to 5,000 1 to 10,000 > 35 0.0004 ± 1 5 0.002		mV/g g pk Hz Hz kHz g RMS % F.S. % g/µε		5.10 980 1 to 5,000 1 to 10,000 > 35 0.0039 ± 1 5 0.02 mV/m/s ² m/s ² pk Hz Hz kHz m/s ² RMS % F.S. % m/s ² /µε																																				
ENVIRONMENTAL Maximum Shock Temperature Range TEDS Operating Temperature Range Seal		1,000 -67 to +325 -40 to +185 Hermetic		g pk °F °F		9800 -55 to +163 -40 to +85 Hermetic m/s ² pk °C °C																																				
ELECTRICAL Supply Current Range [4] Compliance Voltage Range Output Impedance, Typ Bias Voltage Discharge Time Constant Electrical Isolation TEDS Feature		2 to 20 +18 to +30 100 +9 to +14 0.5 to 1.5 10 IEEE 1451.5		mA Volts Ω VDC Sec GΩ, min		2 to 20 +18 to +30 100 +9 to +14 0.5 to 1.5 10 IEEE 1451.5 mA Volts Ω VDC Sec GΩ, min																																				
						 																																				
																																										
						Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-3055 for more information.																																				



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax:818.698.0362 www.dytran.com

For permission to reprint this content, please contact info@dytran.com



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax: 818.698.0362 www.dytran.com
For permission to reprint this content, please contact info@dytran.com