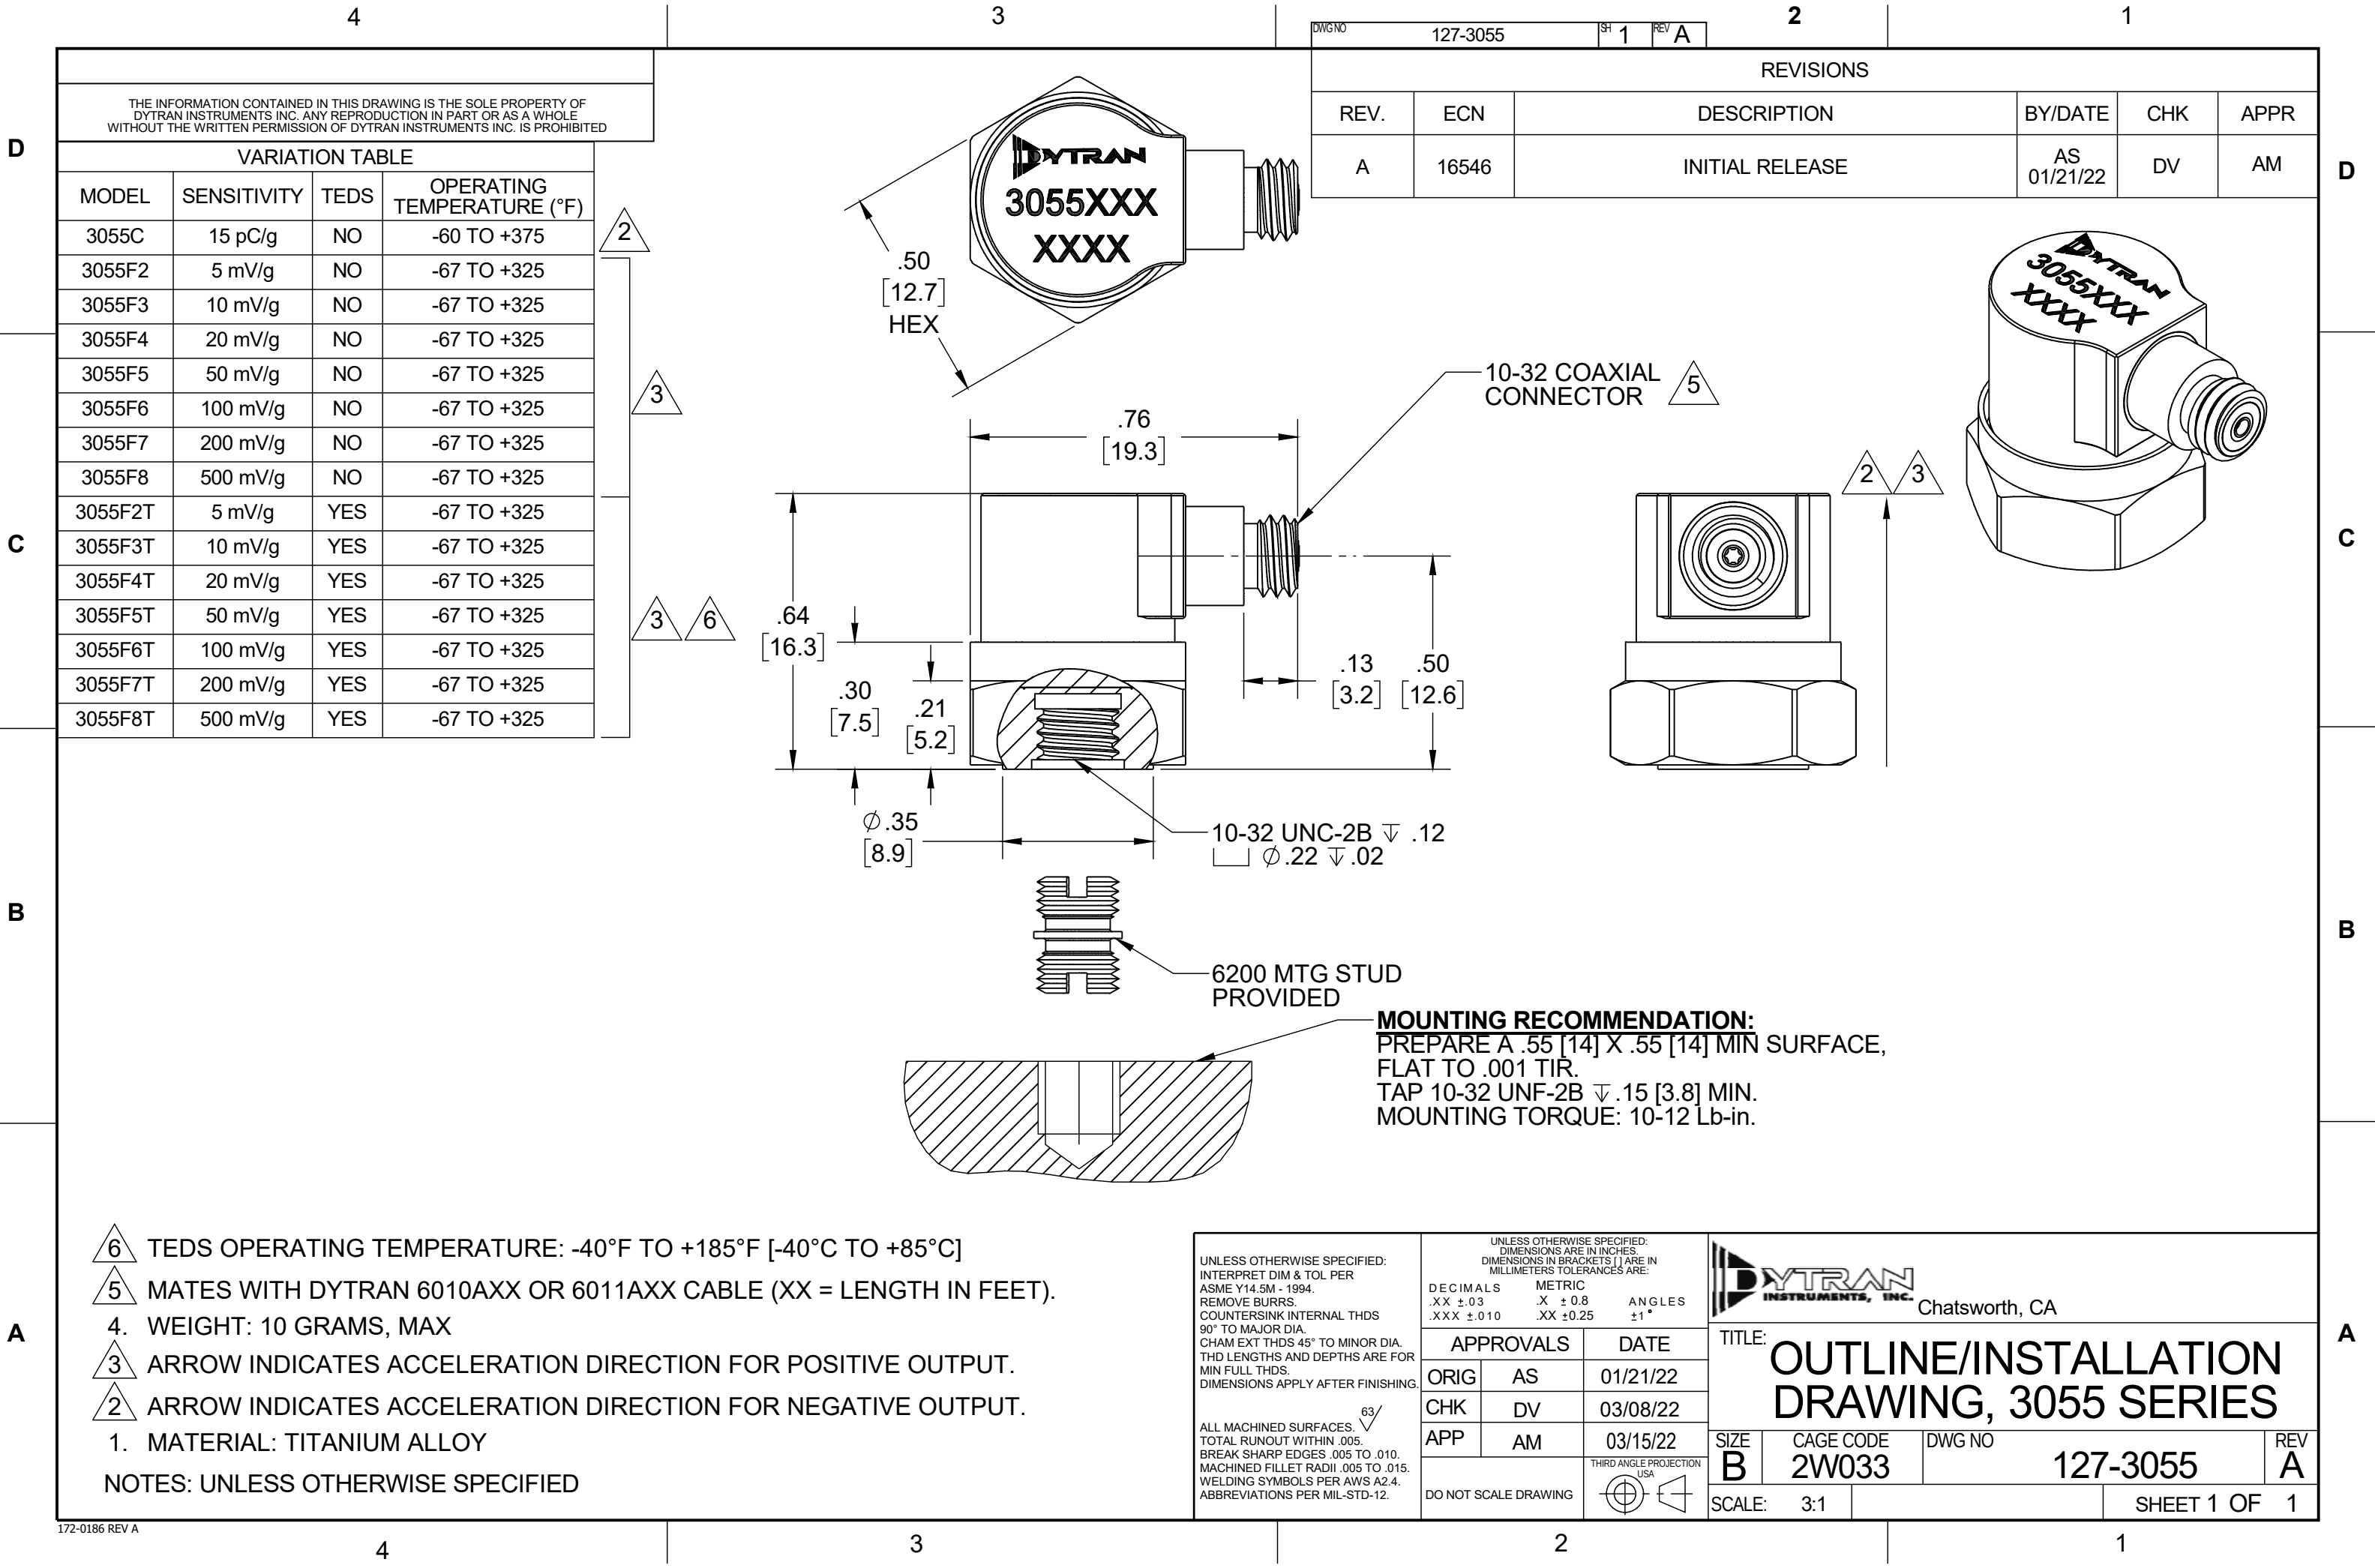




- 6 TEDS OPERATING TEMPERATURE: -40°F TO +185°F [-40°C TO +85°C]
- 5 MATES WITH DYTRAN 6010AXX OR 6011AXX CABLE (XX = LENGTH IN FEET).
4. WEIGHT: 10 GRAMS, MAX
- 3 ARROW INDICATES ACCELERATION DIRECTION FOR POSITIVE OUTPUT.
- 2 ARROW INDICATES ACCELERATION DIRECTION FOR NEGATIVE OUTPUT.

1. MATERIAL: TITANIUM ALLOY

NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED:
INTERPRET DIM & TOL PER
ASME Y14.5M - 1994.
REMOVE BURRS.
COUNTERSINK INTERNAL THDS
90° TO MAJOR DIA.
CHAM EXT THDS 45° TO MINOR DIA.
THD LENGTHS AND DEPTHS ARE FOR
MIN FULL THDS.
DIMENSIONS APPLY AFTER FINISHING.

ALL MACHINED SURFACES.
TOTAL RUNOUT WITHIN .005.
BREAK SHARP EDGES .005 TO .010.
MACHINED FILLET RADII .005 TO .015.
WELDING SYMBOLS PER AWS A2.4.
ABBREVIATIONS PER MIL-STD-12.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES.
DIMENSIONS IN BRACKETS [] ARE IN
MILLIMETERS TOLERANCES ARE:

DECIMALS	METRIC	ANGLES
.XX ±.03	.X ±0.8	±1°
.XXX ±.010	.XX ±0.25	

APPROVALS		DATE
ORIG	AS	01/21/22
CHK	DV	03/08/22
APP	AM	03/15/22

DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION
USA

DYTRAN
INSTRUMENTS, INC.

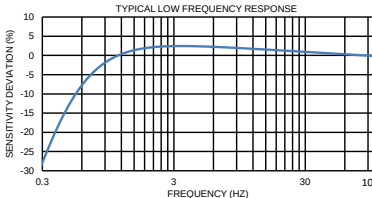
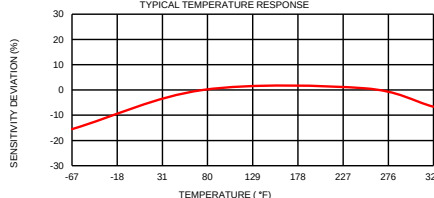
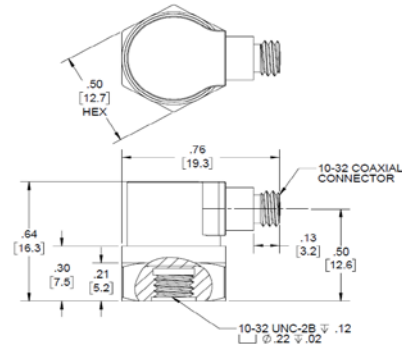
Chatsworth, CA

TITLE: **OUTLINE/INSTALLATION
DRAWING, 3055 SERIES**

SIZE B	CAGE CODE 2W033	DWG NO 127-3055	REV A
------------------	---------------------------	---------------------------	-----------------

SCALE: 3:1

SHEET 1 OF 1

Model Number 3055F7		PERFORMANCE SPECIFICATIONS				DOC NO PS3055F7																																																																									
		IEPE ACCELEROMETER				REV B, ECN 17467, 06/10/24																																																																									
		• HIGH TEMPERATURE • BASE ISOLATED • IDEAL LOW FREQUENCY RESPONSE • HERMETICALLY SEALED				This family also includes: <table><tr><th>Model</th><th>Sensitivity (mV/g)</th><th>Frequency Response, ±10% (Hz)</th><th>Time Constant (Sec)</th><th>Operating Temp (°F)</th></tr><tr><td>3055F2</td><td>5</td><td>1 to 10,000</td><td>0.5 to 1.5</td><td>-67 to +325</td></tr><tr><td>3055F3</td><td>10</td><td>1 to 10,000</td><td>0.5 to 1.5</td><td>-67 to +325</td></tr><tr><td>3055F4</td><td>20</td><td>1 to 10,000</td><td>0.5 to 1.5</td><td>-67 to +325</td></tr><tr><td>3055F5</td><td>50</td><td>1 to 10,000</td><td>0.5 to 1.5</td><td>-67 to +325</td></tr><tr><td>3055F6</td><td>100</td><td>1 to 10,000</td><td>0.5 to 1.5</td><td>-67 to +325</td></tr><tr><td>3055F8</td><td>500</td><td>1 to 10,000</td><td>0.5 to 1.5</td><td>-67 to +325</td></tr></table>		Model	Sensitivity (mV/g)	Frequency Response, ±10% (Hz)	Time Constant (Sec)	Operating Temp (°F)	3055F2	5	1 to 10,000	0.5 to 1.5	-67 to +325	3055F3	10	1 to 10,000	0.5 to 1.5	-67 to +325	3055F4	20	1 to 10,000	0.5 to 1.5	-67 to +325	3055F5	50	1 to 10,000	0.5 to 1.5	-67 to +325	3055F6	100	1 to 10,000	0.5 to 1.5	-67 to +325	3055F8	500	1 to 10,000	0.5 to 1.5	-67 to +325																																					
Model	Sensitivity (mV/g)	Frequency Response, ±10% (Hz)	Time Constant (Sec)	Operating Temp (°F)																																																																											
3055F2	5	1 to 10,000	0.5 to 1.5	-67 to +325																																																																											
3055F3	10	1 to 10,000	0.5 to 1.5	-67 to +325																																																																											
3055F4	20	1 to 10,000	0.5 to 1.5	-67 to +325																																																																											
3055F5	50	1 to 10,000	0.5 to 1.5	-67 to +325																																																																											
3055F6	100	1 to 10,000	0.5 to 1.5	-67 to +325																																																																											
3055F8	500	1 to 10,000	0.5 to 1.5	-67 to +325																																																																											
		Refer to the performance specifications of the products in this family for detailed description																																																																													
PHYSICAL Weight Connector Mounting Provision Material, Housing/Connector Sensing Element Element Style		Type Tapped Hole		<table><tr><th colspan="2">ENGLISH</th><th colspan="2">SI</th></tr><tr><td>0.35</td><td>oz</td><td>10.0</td><td>grams</td></tr><tr><td>10-32</td><td></td><td>10-32</td><td></td></tr><tr><td>10-32 X .150 I</td><td></td><td>10-32 X .150 I</td><td></td></tr><tr><td>Titanium</td><td></td><td>Titanium</td><td></td></tr><tr><td>Ceramic</td><td></td><td>Ceramic</td><td></td></tr><tr><td>Planar Shear</td><td></td><td>Planar Shear</td><td></td></tr></table>				ENGLISH		SI		0.35	oz	10.0	grams	10-32		10-32		10-32 X .150 I		10-32 X .150 I		Titanium		Titanium		Ceramic		Ceramic		Planar Shear		Planar Shear																																													
ENGLISH		SI																																																																													
0.35	oz	10.0	grams																																																																												
10-32		10-32																																																																													
10-32 X .150 I		10-32 X .150 I																																																																													
Titanium		Titanium																																																																													
Ceramic		Ceramic																																																																													
Planar Shear		Planar Shear																																																																													
PERFORMANCE Sensitivity, ±5% [2] Range for ± 5 Volts Output Frequency Response, ±5% Frequency Response, ±10% Resonant Frequency Broad Band Resolution Linearity [3] Maximum Transverse sensitivity Strain Sensitivity @ 250µε		<table><tr><td>200</td><td>mV/g</td><td>20.41</td><td>mV/m/s²</td></tr><tr><td>25</td><td>g pk</td><td>245</td><td>m/s² pk</td></tr><tr><td>1 to 5,000</td><td>Hz</td><td>1 to 5,000</td><td>Hz</td></tr><tr><td>1 to 10,000</td><td>Hz</td><td>1 to 10,000</td><td>Hz</td></tr><tr><td>> 35</td><td>kHz</td><td>> 35</td><td>kHz</td></tr><tr><td>0.0002</td><td>g RMS</td><td>0.0020</td><td>m/s² RMS</td></tr><tr><td>± 1</td><td>% F.S.</td><td>± 1</td><td>% F.S.</td></tr><tr><td>5</td><td>%</td><td>5</td><td>%</td></tr><tr><td>0.002</td><td>g/µε</td><td>0.02</td><td>m/s²/µε</td></tr></table>		200	mV/g	20.41	mV/m/s ²	25	g pk	245	m/s ² pk	1 to 5,000	Hz	1 to 5,000	Hz	1 to 10,000	Hz	1 to 10,000	Hz	> 35	kHz	> 35	kHz	0.0002	g RMS	0.0020	m/s ² RMS	± 1	% F.S.	± 1	% F.S.	5	%	5	%	0.002	g/µε	0.02	m/s ² /µε	<table><tr><td>200</td><td>mV/g</td><td>20.41</td><td>mV/m/s²</td></tr><tr><td>25</td><td>g pk</td><td>245</td><td>m/s² pk</td></tr><tr><td>1 to 5,000</td><td>Hz</td><td>1 to 5,000</td><td>Hz</td></tr><tr><td>1 to 10,000</td><td>Hz</td><td>1 to 10,000</td><td>Hz</td></tr><tr><td>> 35</td><td>kHz</td><td>> 35</td><td>kHz</td></tr><tr><td>0.0002</td><td>g RMS</td><td>0.0020</td><td>m/s² RMS</td></tr><tr><td>± 1</td><td>% F.S.</td><td>± 1</td><td>% F.S.</td></tr><tr><td>5</td><td>%</td><td>5</td><td>%</td></tr><tr><td>0.002</td><td>g/µε</td><td>0.02</td><td>m/s²/µε</td></tr></table>				200	mV/g	20.41	mV/m/s ²	25	g pk	245	m/s ² pk	1 to 5,000	Hz	1 to 5,000	Hz	1 to 10,000	Hz	1 to 10,000	Hz	> 35	kHz	> 35	kHz	0.0002	g RMS	0.0020	m/s ² RMS	± 1	% F.S.	± 1	% F.S.	5	%	5	%	0.002	g/µε	0.02	m/s ² /µε
200	mV/g	20.41	mV/m/s ²																																																																												
25	g pk	245	m/s ² pk																																																																												
1 to 5,000	Hz	1 to 5,000	Hz																																																																												
1 to 10,000	Hz	1 to 10,000	Hz																																																																												
> 35	kHz	> 35	kHz																																																																												
0.0002	g RMS	0.0020	m/s ² RMS																																																																												
± 1	% F.S.	± 1	% F.S.																																																																												
5	%	5	%																																																																												
0.002	g/µε	0.02	m/s ² /µε																																																																												
200	mV/g	20.41	mV/m/s ²																																																																												
25	g pk	245	m/s ² pk																																																																												
1 to 5,000	Hz	1 to 5,000	Hz																																																																												
1 to 10,000	Hz	1 to 10,000	Hz																																																																												
> 35	kHz	> 35	kHz																																																																												
0.0002	g RMS	0.0020	m/s ² RMS																																																																												
± 1	% F.S.	± 1	% F.S.																																																																												
5	%	5	%																																																																												
0.002	g/µε	0.02	m/s ² /µε																																																																												
ENVIRONMENTAL Maximum Shock Temperature Range Seal		<table><tr><td>1,000</td><td>g pk</td><td>9800</td><td>m/s² pk</td></tr><tr><td>-67 to +325</td><td>°F</td><td>-55 to +163</td><td>°C</td></tr><tr><td>Hermetic</td><td></td><td>Hermetic</td><td></td></tr></table>		1,000	g pk	9800	m/s ² pk	-67 to +325	°F	-55 to +163	°C	Hermetic		Hermetic		<table><tr><td>1,000</td><td>g pk</td><td>9800</td><td>m/s² pk</td></tr><tr><td>-67 to +325</td><td>°F</td><td>-55 to +163</td><td>°C</td></tr><tr><td>Hermetic</td><td></td><td>Hermetic</td><td></td></tr></table>				1,000	g pk	9800	m/s ² pk	-67 to +325	°F	-55 to +163	°C	Hermetic		Hermetic																																																	
1,000	g pk	9800	m/s ² pk																																																																												
-67 to +325	°F	-55 to +163	°C																																																																												
Hermetic		Hermetic																																																																													
1,000	g pk	9800	m/s ² pk																																																																												
-67 to +325	°F	-55 to +163	°C																																																																												
Hermetic		Hermetic																																																																													
ELECTRICAL Supply Current Range [4] Compliance Voltage Range Output Impedance, Typ Bias Voltage Discharge Time Constant Electrical Isolation		<table><tr><td>2 to 20</td><td>mA</td><td>2 to 20</td><td>mA</td></tr><tr><td>+18 to +30</td><td>Volts</td><td>+18 to +30</td><td>Volts</td></tr><tr><td>100</td><td>Ω</td><td>100</td><td>Ω</td></tr><tr><td>+9 to +14</td><td>VDC</td><td>+9 to +14</td><td>VDC</td></tr><tr><td>0.5 to 1.5</td><td>Sec</td><td>0.5 to 1.5</td><td>Sec</td></tr><tr><td>10</td><td>GΩ, min</td><td>10</td><td>GΩ, min</td></tr></table>		2 to 20	mA	2 to 20	mA	+18 to +30	Volts	+18 to +30	Volts	100	Ω	100	Ω	+9 to +14	VDC	+9 to +14	VDC	0.5 to 1.5	Sec	0.5 to 1.5	Sec	10	GΩ, min	10	GΩ, min	<table><tr><td>2 to 20</td><td>mA</td><td>2 to 20</td><td>mA</td></tr><tr><td>+18 to +30</td><td>Volts</td><td>+18 to +30</td><td>Volts</td></tr><tr><td>100</td><td>Ω</td><td>100</td><td>Ω</td></tr><tr><td>+9 to +14</td><td>VDC</td><td>+9 to +14</td><td>VDC</td></tr><tr><td>0.5 to 1.5</td><td>Sec</td><td>0.5 to 1.5</td><td>Sec</td></tr><tr><td>10</td><td>GΩ, min</td><td>10</td><td>GΩ, min</td></tr></table>				2 to 20	mA	2 to 20	mA	+18 to +30	Volts	+18 to +30	Volts	100	Ω	100	Ω	+9 to +14	VDC	+9 to +14	VDC	0.5 to 1.5	Sec	0.5 to 1.5	Sec	10	GΩ, min	10	GΩ, min																								
2 to 20	mA	2 to 20	mA																																																																												
+18 to +30	Volts	+18 to +30	Volts																																																																												
100	Ω	100	Ω																																																																												
+9 to +14	VDC	+9 to +14	VDC																																																																												
0.5 to 1.5	Sec	0.5 to 1.5	Sec																																																																												
10	GΩ, min	10	GΩ, min																																																																												
2 to 20	mA	2 to 20	mA																																																																												
+18 to +30	Volts	+18 to +30	Volts																																																																												
100	Ω	100	Ω																																																																												
+9 to +14	VDC	+9 to +14	VDC																																																																												
0.5 to 1.5	Sec	0.5 to 1.5	Sec																																																																												
10	GΩ, min	10	GΩ, min																																																																												
		Supplied Accessories: 1) Accredited calibration certificate (ISO 17025) 2) Model 6200 Mounting Stud, QTY 1 Notes: [1] All specifications are at room temperature unless otherwise specified. [2] Measured at 100 Hz [3] Measure using zero-based straight line method, % of F.S. or any lesser range. [4] Do not apply power to this system without current limiting, 20 mA MAX. To do so will destroy the IC charge amplifier. [5] In the interest of constant product improvement, we reserve the right to change specifications without notice. □ It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.																																																																													
		  																																																																													
		Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-3055 for more information.																																																																													



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax:818.698.0362 www.dytran.com
For permission to reprint this content, please contact info@dytran.com



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax: 818.698.0362 www.dytran.com
For permission to reprint this content, please contact info@dytran.com