




MODEL ZCC910

6 Pin Binder to Cable Assembly (Mates with FUTEK Models TRS300, TRH300)



WIRING CODE


PIN	COLOR
1	BLACK (-EXCITATION)
2	RED (+EXCITATION)
3	SHIELD
4	GREEN (+SIGNAL)
5	WHITE (-SIGNAL)
6	ORANGE (SHUNT CAL)

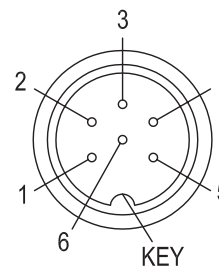


Front View
of Connector

FEATURES

- 95% Braided Shield coverage for optimal EMI protection
- Easily inserts and twists to secure cable
- Keyed to ensure proper mate and pin alignment
- Flexible Polyurethane Cable

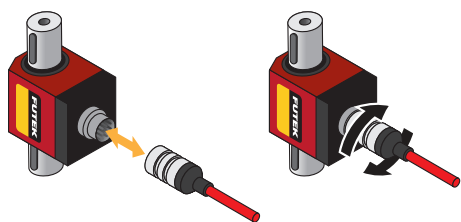

DIMENSIONS inches [mm]

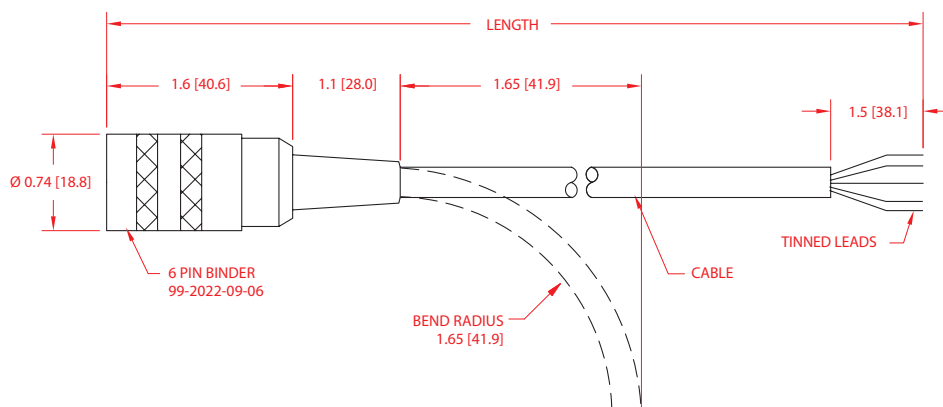

VARIATIONS

ITEM #	LENGTH [FT]	CABLE/CONNECTORS	MATES TO	TEMPERATURE	SPECIFICATIONS
FSH04024	30	ZCC910 to Cable Assembly	flying leads (bare wires)	-40° to 176°F (-40° to 80°C)	6 Pin Binder 99-2022-09-06, 28 AWG, 6 Conductor Braided Shielded Polyurethane, Diameter: 0.165" [4.2], IP50
FSH04027	10				
FSH04076	10	ZCC910 to Binder Male Plug 99 5129 00 12	IHH500/USB520	-22° to 176°F (-30 to 80°C)	
FSH04479	10	ZCC910 to Binder Male Plug 99 5129 00 12 with TEDS (IEEE1451.4)	IHH500 w/ TEDS IEEE1451.4		
FSH04481	10	ZCC910 to 4 Position Terminal Block	IAA100/200	-40° to 176°F (-40° to 80°C)	
FSH04739	10	ZCC910 to 10 Pin Hirose	USB225	-22° to 176°F (-30 to 80°C)	
FSH04832	10	ZCC910 to 10 Pin Hirose with TEDS (IEEE 1451.4)	USB225 Pro Elite		

Drawing Number: FI1579

FUTEK reserves the right to modify its design and specifications without notice. Please visit <http://www.futek.com/salesterms> for complete terms and conditions.

10 Thomas, Irvine, CA 92618 USA

www.futek.com

RoHS



U.S. Manufacturer