

Terms and Conditions of Use

This drawing, including all information depicted herein (collectively, "Drawing"), is FUTEK's property and protected under applicable law, including copyright. FUTEK reserves all rights. The Drawing is provided solely for your information and exclusive use. **Except as expressly approved by FUTEK in writing, you may not reproduce or share this Drawing**, in whole or part, with any other firm or individual, or attempt to reverse engineer the Drawing or data contained therein. Any reproduction of this Drawing in whole or part must include this legend.

By accessing the Drawing, you agree that you have read, understand, and agree to abide by the stated Terms and Conditions of Use.

© 2023 FUTEK Advanced Sensor Technology, Inc.

FUTEK MODEL QLA285


PARALLEL BEAM LOAD CELL

ITEM NUMBER: SEE CHART

INCH [mm]		R.O.= Rated Output	
WIRING CODE			
+ Excitation	- Excitation	+ Signal	- Signal
RED	WHITE	BLUE	GREEN
Shield	 PROTECTIVE COATING		
FLOATING			




PROTECTIVE COATING
BOTH SIDES

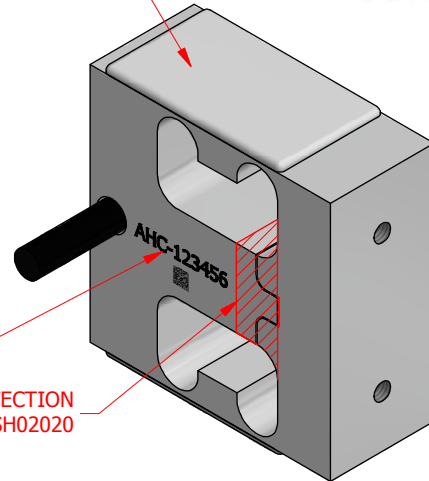

- OUTPUT
↑
↓
+ OUTPUT



S/N WITH DATAMATRIX

OVERLOAD PROTECTION
NOT AVAILABLE ON QSH02020

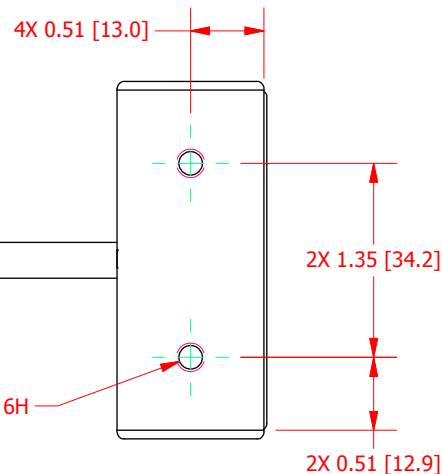

4X M5x0.8 - 6H

OVERLOAD PROTECTION
NOT AVAILABLE ON QSH02020

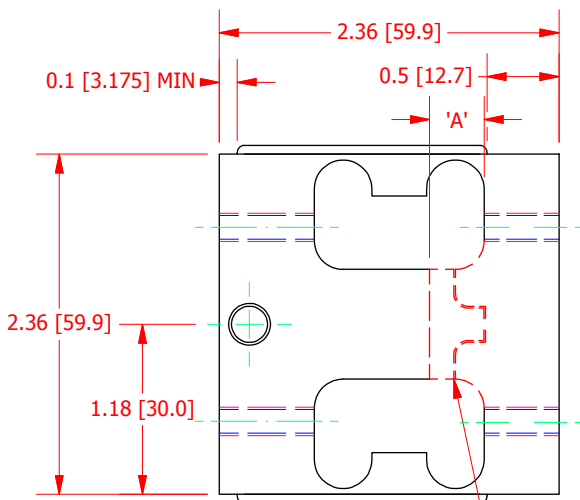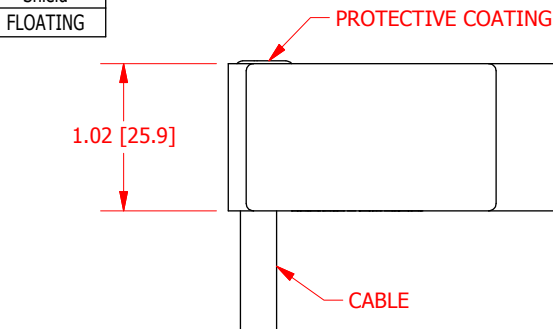

SPECIFICATIONS:

RATED OUTPUT	2 mV/V nom.
CAPACITY	15 lb. [66.6N]
SAFE OVERLOAD	See Chart
ZERO BALANCE	±2% of R.O.
EXCITATION (VDC OR VAC)	18 MAX
BRIDGE RESISTANCE	350 Ω nom.
NONLINEARITY	±0.05% of R.O.
HYSTERESIS	±0.05% of R.O.
NONREPEATABILITY	±0.01% of R.O.
TEMP. SHIFT ZERO	±0.01% of R.O./°F (±0.018 of R.O./°C)
TEMP. SHIFT SPAN	±0.01% of LOAD/°F (±0.018 of LOAD/°C)
COMPENSATED TEMP.	60 to 160 °F (16 to 71 °C)
OPERATING TEMP	0 to 160 °F (-18 to 71 °C)
WEIGHT (approx)	0.4 lb [181.4 g]
MATERIAL	Aluminum
CABLE: #26 Awg 4 Conductor Shielded Cable, 8 in [20 cm] Long	
RoHS 2011/65/EU Compliant	

ITEM#	OVERLOAD PROTECTION	'A'	SAFE OVERLOAD
QSH02019	YES	0	150 lb [667 N]
QSH02020	NO	0.38 [9.65]	22.5 lb [100 N]

CUSTOMER APPROVAL- COMPANY:

CUSTOMER APPROVAL- NAME / DATE:

REVISIONS: (Refer to dwg # revision sheet)

OUTLINE DRAWING


STANDARD NOTES: (Unless Otherwise Specified)

ALL DIMENSIONS ARE IN INCHES
DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
THREADS PER HANDBOOK H-28
DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
± 1/2°

CHAMFER:
± .5°

TOLERANCE:
.X ± 0.1"
.XX ± 0.01"
.XXX ± 0.005"



FUTEK

This drawing, including all information depicted herein (collectively, "Drawing"), is FUTEK's property and protected under applicable law, including copyright. FUTEK reserves all rights. The Drawing is provided solely for your information and exclusive use. **Except as expressly approved by FUTEK in writing, you may not reproduce or share this Drawing** in whole or part, with any other firm or individual, or attempt to reverse engineer the Drawing or data contained therein. Any reproduction of this Drawing in whole or part must include this legend.

MODEL: QLA285	DWG No.: FO1476
DRAWN BY: S. MICHEL	CREATED DATE: 8/24/2018
APPROVED BY: R. WALKER	APPROVED DATE: 9/13/2018
CHECKED BY:	CAGE: 1X8M6 SHEET: 1 OF 1